


N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
D95BMP5N0B



A

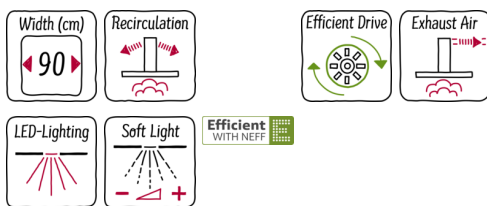

The coordinating and stylish Neff box hood is modern in design and keeps up with your cooking.

- ✓ High extraction rate: Ensures a clear view while cooking thanks to efficient motor technology as either a ducted or recirculating solution.
- ✓ Special noise insulation: guarantees an extremely quiet cooking experience
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a finger
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 46
 Minimum distance above an electric hob : 550
 Minimum distance above a gas hob : 650
 Net weight (kg) : 20.213
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 427
 Boost position output recirculating (m³/h) : 378
 Maximum output recirculating air (m³/h) : 324
 Boost position air extraction (m³/h) : 702
 Number of lights (Stck) : 3
 Noise level (dB(A) re 1 pW) : 55
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable stainless steel
 EAN code : 4242004234913
 Connection rating (W) : 145
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

Z50XP0X0	CleanAir act.carbon filter regenerative
Z5102X1	Active carbon filter
Z5102X5	Recirculating kit
Z5170X1	CleanAir active carbon filter spare part
Z51FXI0X5	Integrated CleanAir Recirculation Kit
Z51FXJ0X5	Integrated CleanAir Recirculation Kit
Z5276X0	CleanAir Recirculation Kit
Z5861N0	Back panel stainless steel
Z5895N0	Stainless steel back panel
Z5906N1	Chimney extension 1000 mm
Z5916N1	Chimney extension 1500 mm



4 242004 234913

N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
D95BMP5NOB

Features

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 427 m³/h
Intensive 702 m³/h
- Noise max. Normal Level: 55 dB*

Features

- Touch control
- 3 power levels and 2 intensive settings
- 3 x 1.5w LED Light
- softLight with dimmer function
- Efficient BLDC-technology
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- Noise reduction function
- Additional noise insulation
- easy to clean Inner frame

Design

- Stainless steel
- Box design
- Chimney hood
- For wall mounted installation
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 427 m³/h
Intensive 702 m³/h
- Extraction rate according to EN 61591 max. 427 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
Intensive: 66 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 55 dB (A) re 1pW
- Noise max. Normal Level: 55 dB*
- Power rating: 145 W
- Light Intensity: 359 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 628-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 628-1064 x 898 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD): 809-1139 x 898 x 500 mm
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 33.6 kWh/year*

* In accordance with the EU-Regulation No 65/2014

N 70, Wall-mounted cooker hood, 90 cm, Stainless steel
 D95BMP5N0B

Dimensioned drawings

