


T56FT60X0 INDUCTION HOB
 BEVELLED FRONT EDGE
 592 MM

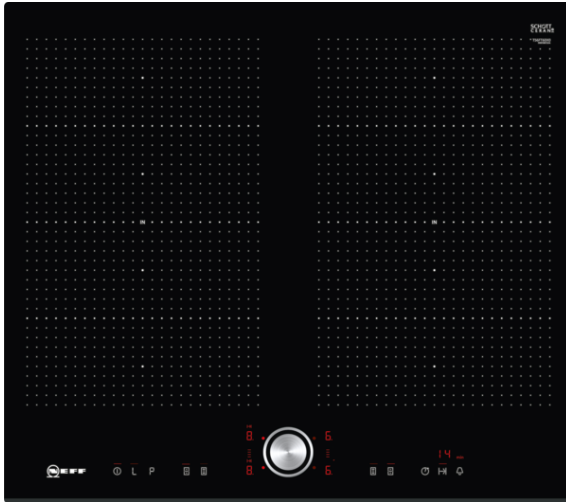

Standalone FlexInduction cooktop with TwistPad control.

- ✓ Induction - With induction cooking, the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ FlexInduction - The FlexZone lets you place your pots and pans anywhere you want and heats them exactly where they stand.
- ✓ The TwistPad® is a removable, magnetic control knob that gives you precise, convenient control over all cooking zones.
- ✓ PowerMove - The FlexZone is divided into three heating zones: boiling in front, simmering in the middle and warming in the rear.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Width of the product (mm) : 592
 Dimensions of the product (mm) : 51 x 592 x 522
 Net weight (kg) : 14.0
 Gross weight (kg) : 16.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black
 Approval certificates : AENOR, CE
 Length of electrical supply cord (cm) : 110
 Sealed Burners : No
 heating with booster : All
 Power of 2nd heating element (kW) : 3.3
 Power of heating element (kW in boost) : [3.7]
 Power of 2nd heating element (kW in boost) : 3.7
 Power of 6th heating element (kW in boost) : 3.7
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Main colour of product : Black
 Energy input : Electric
 Approval certificates : AENOR, CE
 Plug type : no plug
 Required cutout/niche size for installation (in) : x x
 Appliance Dimensions (h x w x d) (in) : + x x
 Dimensions of the packed product (in) : 4.96 x 23.74 x 29.64
 Net weight (lbs) : 31
 Gross weight (lbs) : 34
 Total number of positions that can be used at the same time : 4
 Length of electrical supply cord (cm) : 110
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Dimensions of the product (mm) : 51 x 592 x 522
 Net weight (kg) : 14.0
 Gross weight (kg) : 16.0



Optional accessories

Z9410X1 Stainless Steel roaster with glas lid

T56FT60X0 INDUCTION HOB
BEVELLED FRONT EDGE
592 MM

Features

Control

- TwistPad®

Flexibility

- 2 Flex zones
- 4 zone induction hob
-

Special features

- Boost setting for all zones
- PanBoost
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
LED timer for each zone with switch off function and acoustic signal
Count up timer
- ReStart function
- Automatic pan recognition
4.6kW power output (20A); current management options for 16A, 13A or 10A connection
Safety cut out facility
Control panel lock
Control panel suspension
- Keep warm function
- Energy consumption display

Technical information

- Cooking zones: 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Measurement: (H/B/T) 51 x 592 x 522 mm
- Installation dimensions: (ID/W/D) 51 mm x 560 mm x 490 mm
- 60 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 30 mm
- Output 7400 W
- Cable included in packaging

T56FT60X0 INDUCTION HOB
 BEVELLED FRONT EDGE
 592 MM

Dimensioned drawings

