

Product Finish: Chrome

Product code: AT2070  
EAN13 barcode: 5060344155922



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


### Product features:

- Metal construction throughout
- Supplied complete with flexible tail pipes for fast simple fitting
- Minimalist planate design form
- Quarter turn handle action for precise flow control
- Antisplash spout supplied as standard

### Additional information / Parts included:

Includes triangular stabilising bracket, 2.0 & 2.5mm A/F Allen key & high flow aerator

### Product dimensions:

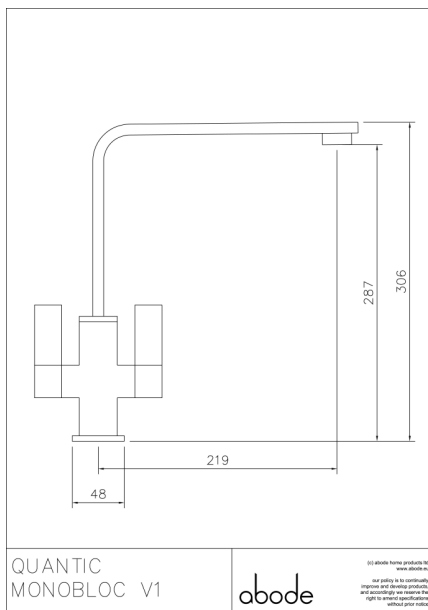

- Overall Height / projection: 306 mm
- Exit reach: 219 mm
- Exit height: 287 mm
- Centre distance(s):


- Base diameter(s): 48 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 45 mm

- Spout diameter: 30 x 10 mm
- Spout aerator size: M24

### Packaged properties:

- |                         |                      |
|-------------------------|----------------------|
| Box length: 445mm       | Box depth: 70mm      |
| Box width: 335mm        | Units per outer: 5   |
| Tap only weight: 1.30kg | Boxed weight: 1.74kg |

### Product flow characteristics:

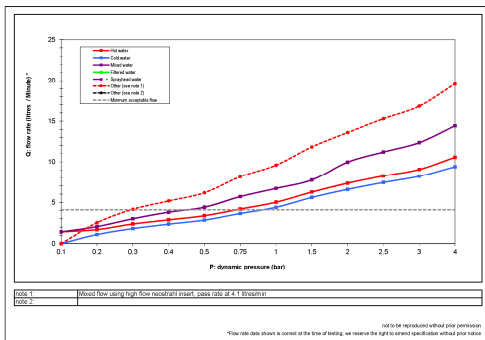

- Min / Max water pressure: 0.30 / 5.50 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 12.36

- Control valve type: M20 ceramic disc, quarter turn operation
- Product flow characteristics: Single flow
- Non return valve(s): Cold only

- Aerator type: Honeycomb aerator & hi-flow neostrahl
- Accepts revolve / spray areator: No
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M10 / 1/2" Male (Hot), 1/2" Female (Cold)
- Inlet pipe type / length: flexible stainless braided hose / 365/370 mm

### Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

### Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year