


+


SAHARA
PERFORATED
PRODUCT DATA SHEET
WWW.SEKTORINTERIORS.COM

PARTITIONING | GLAZING | BLINDS & GRAPHICS
DOORS & IRONMONGERY | CEILINGS | WALLS & FRAMES | WASHROOMS


SAHARA
PERFORATED

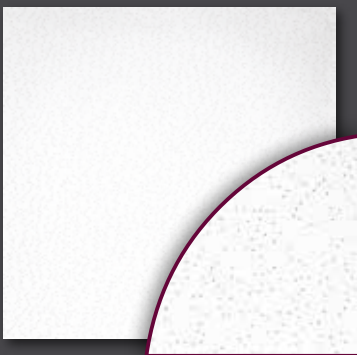

SQUARE EDGE PROFILE



TEGULAR EDGE PROFILE

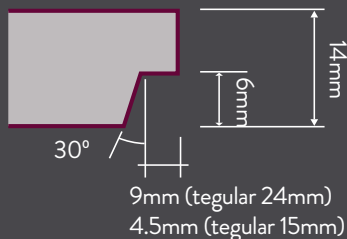

PRODUCT DATA SHEET

A CRISP WHITE, FINELY GRANULATED, NEEDED TILE PROVIDING QUALITY ALL-ROUND HIGH PERFORMANCE RATINGS.

DIMENSIONS

Thickness	14mm nom	
Size & Edge Detail	Square Edge	600 x 600mm and 1200 x 600mm
	Tegular 15mm Edge	600 x 600mm
	Tegular 24mm Edge	600 x 600mm

GENERAL DATA

Surface Pattern	Fine texture with surface needling
Composition	Manufactured from biosoluble mineral wool, organic binders and natural fillers
Grid Compatibility	See grid compatibility matrix below
Colour	White
Light Reflection	Approx. 87%

FIRE PERFORMANCE

Reaction to Fire A2-s1, d0 (EN13501-1)

ACOUSTIC PERFORMANCE

Room to Room Airborne Sound Reduction	29dB
Sound Absorption	$\alpha_w = 0.45$ NRC = 0.45 SRA = 0.45
Absorption Class	Class D

HUMIDITY RESISTANCE

Up to 90% RH

HANDLING & STORAGE

Do not throw, drop or place cartons on edges or corners. When storing cartons place on a clean, flat surface within a dry, controlled environment

INSTALLATION

Sektor ceiling systems should be installed in accordance with manufacturer's recommendations and relevant test reports

EUROPEAN HARMONISED STANDARD

EN13964

RELEASE OF FORMALDEHYDE

Class E1 = $124\mu\text{g}/\text{m}^3$, Sektor tiles $5\mu\text{g}/\text{m}^3$ (ISO 1600)

ASBESTOS

No Content

*Main runner at 600mm centres



GRID COMPATIBILITY MATRIX

Description	Pack Coverage (m ²)	Edge	15mm Grid	24mm Grid
SEK Sahara Perf SE 600 X 600 X 14	4.32m ²	Square	Yes	Yes
SEK Sahara Perf SE 1200 X 600 X 14	7.20m ²	Square	Yes	Yes
SEK Sahara TE 24 600 X 600 X 14	4.32m ²	Teg 24mm	No	Yes
SEK Sahara TE 15 600 X 600 X 14	4.32m ²	Teg 15mm	Yes	No