



CORTEGA

Inspiring Great Spaces™

Armstrong[®]
CEILING SOLUTIONS

CORTEGA



Recycled Content

Light Reflectance

Intelligibility


CORTEGA

BOARD


TEGULAR



Prelude 24 - XL²/TLX
Prelude 24 Sixty² - XL²/TLX



Prelude 24 - XL²/TLX
Prelude 24 Sixty² - XL²/TLX



600 x 600 x 15 mm
1200 x 600 x 15 mm

9102 M
9101 M

9105 M



EN ISO 354 & EN ISO 11654


α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(H)	0.55	0.30	0.35	0.50	0.65	0.70	0.80	α_p

Class D



EN ISO 10848-2 & EN ISO 717-1

Dnfw
34 dB

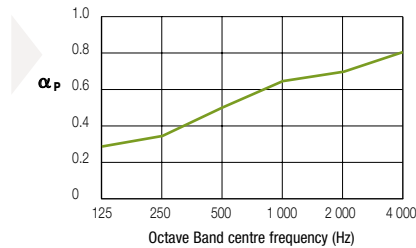

EEA Euroclass A2-s1, d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667 & ISO 8301

$\lambda = 0.060 \text{ W/m K}$



70 % RH



3.5 kg/m²



Please contact our Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu