



NEEVA

The smooth laminated finish of the NEEVA products combines Class A sound absorption and aesthetics.


Key features

- Excellent sound absorption: up to 1.00 α_w
- Painted edges to improve the mechanical strength
- Fibre glass fleece on the back to add strength

Application areas

Ideal for open spaces (call centres, libraries, cafeteria...).

OFFICE - Dutch Technology (NL)
NEEVA Board 1200 x 1200 mm

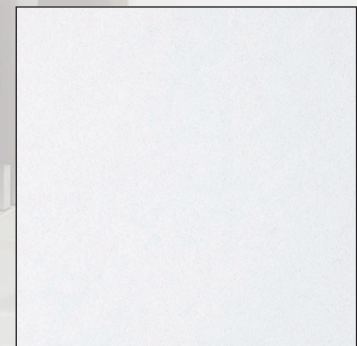

Inspiring Great Spaces®

Armstrong[®]
CEILING SOLUTIONS

EDGE DETAIL	BOARD	TEGULAR 90	MICROLOOK 90																																																													
THICKNESS (mm)	15/18	18	18																																																													
MODULES (mm)	600 x 600 x 15 2691M 1200 x 600 x 15 2692M 600 x 600 x 18 2404M 675 x 675 x 18 2409M 1200 x 600 x 18 2405M 1200 x 1200 x 18 2406M 1800 x 300 x 18 2408M 1800 x 600 x 18 2407M 1350 x 600 x 18 2410M 1350 x 675 x 18 2411M	600 x 600 2414M 675 x 675 2418M 1200 x 600 2415M 1200 x 1200 2416M	600 x 600 2423M 675 x 675 2427M 1200 x 600 2424M																																																													
SUSPENSION SYSTEMS	Prelude 24 XL ² / TLS Prelude 24 CR / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 15 TL / XL ² Interlude HRC XL ² Silhouette 6mm XL ²																																																													
COLOURS	COLORTONE NEEVA																																																															
	Global White	Black (BK)	Cement (CG)	Navy (NY)	Metal (MT)																																																											
SUSTAINABILITY																																																																
	20		A	E1																																																												
ACOUSTICS																																																																
	<table border="1"> <thead> <tr> <th></th> <th>D_{ncw}</th> <th>R_w</th> <th>α_w</th> <th>Class</th> <th>NRC</th> <th colspan="6">Hz α_p</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>• Board (15 mm)</td> <td>-</td> <td>7 dB</td> <td>1.00</td> <td>A</td> <td>0.95</td> <td>0.40</td> <td>0.90</td> <td>1.00</td> <td>0.90</td> <td>1.00</td> <td>1.00</td> </tr> <tr> <td>• Board (18 mm)</td> <td>24 dB</td> <td>-</td> <td>1.00</td> <td>A</td> <td>0.95</td> <td>0.40</td> <td>0.85</td> <td>1.00</td> <td>0.90</td> <td>1.00</td> <td>0.95</td> </tr> <tr> <td>• Tegular 90, MicroLook 90</td> <td>27 dB</td> <td>-</td> <td>0.90</td> <td>A</td> <td>0.85</td> <td>0.40</td> <td>0.75</td> <td>0.85</td> <td>0.85</td> <td>0.95</td> <td>0.95</td> </tr> </tbody> </table>					D _{ncw}	R _w	α _w	Class	NRC	Hz α _p												125	250	500	1000	2000	4000	• Board (15 mm)	-	7 dB	1.00	A	0.95	0.40	0.90	1.00	0.90	1.00	1.00	• Board (18 mm)	24 dB	-	1.00	A	0.95	0.40	0.85	1.00	0.90	1.00	0.95	• Tegular 90, MicroLook 90	27 dB	-	0.90	A	0.85	0.40	0.75	0.85	0.85	0.95	0.95
	D _{ncw}	R _w	α _w	Class	NRC	Hz α _p																																																										
						125	250	500	1000	2000	4000																																																					
• Board (15 mm)	-	7 dB	1.00	A	0.95	0.40	0.90	1.00	0.90	1.00	1.00																																																					
• Board (18 mm)	24 dB	-	1.00	A	0.95	0.40	0.85	1.00	0.90	1.00	0.95																																																					
• Tegular 90, MicroLook 90	27 dB	-	0.90	A	0.85	0.40	0.75	0.85	0.85	0.95	0.95																																																					
FIRE REACTION		EEA Euroclass A1 EN 13501-1	RUS KM1 (G1, V1, D1, T1) FZ 123																																																													
OTHER PERFORMANCES & FEATURES	82% λ = 0.033 W/m K <small>EN 12667 & ISO 8301</small>	95% RH 1.2 kg/m ² Board (15 mm) 1.3 kg/m ² Board (18 mm) 2.5 kg/m ² Tegular 90 & MicroLook 90 (18 mm)	 	 																																																												
CUSTOM OPTIONS		Dimensions																																																														