

Declaration of Performance

G0001GPCPR

(This document references Knauf Insulation DOP's G4207GPCPR and G4209GPCPR)

1. Unique Identification code of the product-type:
Therma Quilt 40, Frametherm Roll 40, Frametherm Slab 40, Steeltherm Roll 40, Steeltherm Slab 40; Factoryclad 40, Factoryclad SE 40, Loft Roll 40 Ready Cut, Loft Roll 40 Combi Cut, Earthwool Combi Cut, Earthwool OmniFit Roll 40, Classic 040, Earthwool 040, Factoryclad 40, Frametherm 40, Loft Roll 40, Therma-Quilt 040.
2. Type, Batch or serial number or any other element allowing identification of the construction product as required under article 11(4) of the CPR:
See Product Label.
3. Intended use or uses of the construction product , in accordance with the applicable harmonised technical specification foreseen by the manufacturer:
Thermal Insulation for Buildings (ThIB) - EN 13162:2012+A1:2015
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):
Knauf Insulation
Am Bahnhof 7, 97346 Iphofen,
Deutschland
www.knaufinsulation.com
Contact: dop@knaufinsulation.com
5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):
Not applicable.
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:
 - AVCP System 1 for Reaction to Fire
 - AVCP System 3 for the other characteristics
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:
BSI (Notified certification body N° 0086) performed the initial inspection of the manufacturing plant and factory production control and the continuous surveillance, assessment and evaluation of factory production control; and issued the certificate of constancy of performance for reaction to fire.

BSI (Notified testing laboratory N°0086) performed the test reports for the other declared characteristics.
8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:
Not applicable.

9. Declared Performances:

Essential Characteristics	G0001GPCPR				Harmonised Technical Specification
	Performance	Therma Quilt 40	Frametherm Roll 40	Frametherm Slab 40	
Thermal Resistance	Thermal conductivity (W/mK)	0,040	0,040	0,040	EN 13162:2012 +A1:2015
	Thermal Resistance	See product label			
	Thickness range (mm)	130-280	90-140	90-140	
	Thickness tolerance	T1	T1	T1	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces ^d	NPD	NPD	NPD	
Compressive Strength	Compressive Strength/Compressive Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing / degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing / degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	WS	NPD	NPD	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapour transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{d_L}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NPD – No performance determined					

Essential Characteristics	G0001GPCPR					Harmonised Technical Specification
	Performance	Steeltherm Roll 40	Steeltherm Slab 40	Factoryclad 40 SE	Factoryclad 40	
Thermal Resistance	Thermal conductivity (W/mK)	0,040	0,040	0,040	0,040	EN 13162:2012 +A1:2015
	Thermal Resistance	See product label				
	Thickness range (mm)	90 - 140	200	80 -260	140	
	Thickness tolerance	T1	T1	T1	T1	
Reaction to Fire	Reaction to fire	A1	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces ^d	NPD	NPD	NPD	NPD	
Compressive Strength	Compressive Strength / Compressive Stress	NPD	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing / degradation	Durability Characteristics ^a	NPD	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing / degradation	Thermal Resistance ^b	NPD	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	NPD	
Water Permeability	Short term water absorption	NPD	NPD	WS	NPD	
	Long term water absorption	NPD	NPD	NPD	NPD	
Water vapour permeability	Water vapour transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	NPD	
	Thickness ^{d_L}	NPD	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	NPD	
NPD – No performance determined						

Essential Characteristics	G0001GPCPR				Harmonised Technical Specification
	Performance	Loft Roll 40 Combi Cut, Ready Cut	Earthwool Combi Cut	Earthwool OmniFit Roll	
Thermal Resistance	Thermal conductivity (W/mK)	0,040	0,040	0,040	EN 13162:2012 +A1:2015
	Thermal Resistance	See product label			
	Thickness range (mm)	100 – 200	100 – 200	100-200	
	Thickness tolerance	T1	T1	T1	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces ^g	NPD	NPD	NPD	
Compressive Strength	Compressive Strength / Compressive Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing / degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing / degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	NPD	NPD	NPD	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapour transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{dL}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NPD – No performance determined					

Essential characteristics	DOP No G0001GPCPR				Harmonised technical specification
	Performance	Classic 040	Earthwool 040	Factoryclad 40	
Thermal Resistance	Thermal conductivity (W/mK)	0.040	0.040	0.040	EN 13162:2012 +A1:2015
	Thermal Resistance	See product label	See product label	See product label	
	Thickness range (mm)	50-200	100-200	80-220	
	Thickness tolerance	T1	T1	T1	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces ^d	NPD	NPD	NPD	
Compressive Strength	Compressive Stress / Compression Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	NPD	NPD	NPD	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapor transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{d_L}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NPD – No performance determined					


Essential characteristics	DOP No G0001GPCPR				Harmonised technical specification
	Performance	Frametherm 40	Loft Roll 40	Therma-Quilt 040	
Thermal Resistance	Thermal conductivity (W/mK)	0.040	0.040	0.040	EN 13162:2012 A1:2015
	Thermal Resistance	See product label	See product label	See product label	
	Thickness range (mm)	90-140	100-200	60-220	
	Thickness tolerance	T1	T1	T1	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces ^d	NPD	NPD	NPD	
Compressive Strength	Compressive Stress / Compression Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	NPD	NPD	NPD	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapor transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{d_L}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NPD – No performance determined					

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Gornall - Plant Manager
(Name and function)

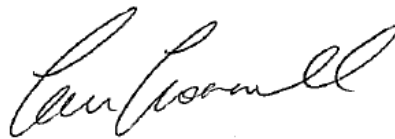

(Signature)

St Helens, UK - 16/11/2015
(Place and date of issue)

Darren Holt – Plant Manager
(Name and function)



(Signature)

Cwmbran – 16/11/2015
(Place and date of issue)

This document is outside of the Knauf Insulation management system and therefore 'uncontrolled'.

To ensure accuracy of the required information, please refer to: www.dopki.com using the DOP code provided on the product packaging.

- ^a No change in reaction to fire properties for MW Products
The fire performance of MW does not deteriorate with time. The Euroclass classification of the product is related to the organic content, which cannot increase with time
- ^b Thermal conductivity of MW products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air
- ^c For dimensional stability thickness only
- ^d This characteristic also covers handling and installation
- ^e European test methods are under development
- ^f Also valid and applicable for multilayers