

Declaration of Performance

G0001LPCPR

(This document reference Knauf Insulation DOP's G4207LPCPR and G4209LPCPR)

1. Unique Identification code of the product-type:
DriTherm Cavity Slab, DriTherm Cavity Slab 35, EcoBatt 035, FrameTherm Roll, FrameTherm Slab, Universal Slab, Earthwool OmniFit Slab, Factoryclad 35, Frametherm Roll 35, Frametherm Roll 35.
2. Type, Batch or serial number or any other element allowing identification of the construction product as required under article 11(4) of the CPR:
See Product Label.
3. Intended use or uses of the construction product , in accordance with the applicable harmonised technical specification foreseen by the manufacturer:
Thermal Insulation for Buildings (ThIB) - EN 13162:2012+A1:2015
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5):
Knauf Insulation
Am Bahnhof 7, 97346 Iphofen,
Deutschland
www.knaufinsulation.com
Contact: dop@knaufinsulation.com
5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):
Not applicable.
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:
 - AVCP System 1 for Reaction to Fire
 - AVCP System 3 for the other characteristics
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:
BSI (Notified certification body N° 0086) performed the initial inspection of the manufacturing plant and factory production control and the continuous surveillance, assessment and evaluation of factory production control; and issued the certificate of constancy of performance for reaction to fire.

BSI (Notified testing laboratory N°0086) performed the test reports for the other declared characteristics.
8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:
Not applicable.

9. Declared Performances:

Essential Characteristics	G0001LPCPR				Harmonised Technical Specification
	Performance	DriTherm Cavity Slab 035	EcoBatt 035	FrameTherm Roll	
Thermal Resistance	Thermal conductivity (W/mK)	0,035	0,035	0,035	EN 13162:2012 +A1:2015
	Thermal Resistance	See product label			
	Thickness range (mm)	40 – 50	50 – 175	90 – 140	
	Thickness tolerance	T4	T4	T2	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces	NPD	NPD	NPD	
Compressive Strength	Compressive Strength/Compressive Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing / degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing / degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	WS	NPD	WS	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapour transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{dL}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NPD – No performance determined					

Essential Characteristics	G0001LPCPR				Harmonised Technical Specification
	Performance	FrameTherm Slab	Universal Slab	Earthwool OmniFit Slab	
Thermal Resistance	Thermal conductivity (W/mK)	0,035	0,035	0,035	EN 13162:2012 +A1:2015
	Thermal Resistance	See product label			
	Thickness range (mm)	90 – 140	50 -100	50-140	
	Thickness tolerance	T4	T4	T4	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NPD	NPD	NPD	
Tensile/Flexural strength	Tensile strength perpendicular faces ^f	NPD	NPD	NPD	
Compressive Strength	Compressive Strength / Compressive Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing / degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing / degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	NPD	NPD	NPD	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapour transmission, water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{d_L}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NPD – No performance determined					


Essential characteristics	DOP No G0001LPCPR				Harmonised technical specification
	Performance	Factoryclad 35	Frametherm Roll 35	Frametherm Roll 35	
Thermal Resistance	Thermal conductivity (W/mK)	0.035	0.035	0.035	EN 13162:2012 +A1:2015
	Thermal Resistance	See Product Label	See Product Label	See Product Label	
	Thickness range (mm)	90-140	90-140	140	
	Thickness tolerance	T1	T1	T1	
Reaction to Fire	Reaction to fire	A1	A1	A1	
Continuous glowing combustion	Continuous glowing combustion ^e	NDP	NPD	NDP	
Tensile/Flexural strength	Tensile strength perpendicular faces ^d	NPD	NPD	NPD	
Compressive Strength	Compressive Stress / Compression Stress	NPD	NPD	NPD	
	Point Load	NPD	NPD	NPD	
Durability of compressive Strength against ageing / degradation	Compressive creep	NPD	NPD	NPD	
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability Characteristics ^a	NPD	NPD	NPD	
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal Resistance ^b	NPD	NPD	NPD	
	Thermal conductivity ^b	NPD	NPD	NPD	
	Durability characteristics ^c	NPD	NPD	NPD	
Water Permeability	Short term water absorption	NPD	NPD	NPD	
	Long term water absorption	NPD	NPD	NPD	
Water vapour permeability	Water vapour transmission / water vapour diffusion resistance factor	NPD	NPD	NPD	
Impact noise transmissions index (for floors)	Dynamic stiffness	NPD	NPD	NPD	
	Thickness ^{dL}	NPD	NPD	NPD	
	Compressibility ^c	NPD	NPD	NPD	
	Air flow resistivity	NPD	NPD	NPD	
Acoustic absorptions index	Sound absorption	NPD	NPD	NPD	
Direct airborne sound insulation index	Air flow resistivity	NPD	NPD	NPD	
Release of dangerous substances to the indoor environment	Release of dangerous substances ^e	NPD	NPD	NPD	
NDP – No performance determined					

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ian Gornall - Plant Manager
(Name and function)

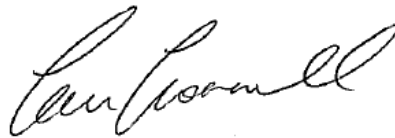

(Signature)

St Helens, UK - 16/11/2015
(Place and date of issue)

Darren Holt – Plant Manager
(Name and function)



(Signature)

Cwmbran – 16/11/2015
(Place and date of issue)

This document is outside of the Knauf Insulation management system and therefore 'uncontrolled'.

To ensure accuracy of the required information, please refer to: www.dopki.com using the DOP code provided on the product packaging.

- ^a No change in reaction to fire properties for MW Products
The fire performance of MW does not deteriorate with time. The Euroclass classification of the product is related to the organic content, which cannot increase with time
- ^b Thermal conductivity of MW products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air
- ^c For dimensional stability thickness only
- ^d This characteristic also covers handling and installation
- ^e European test methods are under development
- ^f Also valid and applicable for multilayers