



PERLA OP dB

PERLA OP dB combines the smooth Perla laminated appearance with the highest levels of sound absorption and sound attenuation in one tile, providing a solution for flexible working spaces.


Key features

- PERLA OP dB includes a large selection of sizes and quality edge details enhancing the durability
- The best acoustical combination of high sound absorption and high sound attenuation properties

Application areas

Language room, libraries.

OFFICE - Swedbank Customer Service Center (LT)
PERLA OP dB Tegular

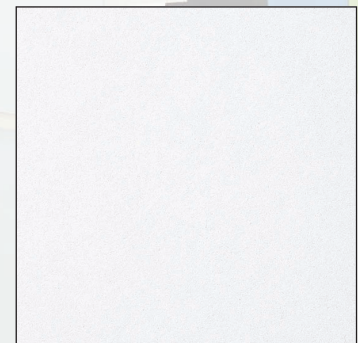

Inspiring Great Spaces®

Armstrong[®]
CEILING SOLUTIONS

EDGE DETAIL	BOARD	TEGULAR	MICROLOOK 90
THICKNESS (mm)	40	40	40
MODULES (mm)	600 x 6005044M 1200 x 6005045M	600 x 6005104M	600 x 6005114M
SUSPENSION SYSTEMS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 15 TL / XL ² Interlude HRC XL ² Silhouette XL ²
COLOURS	 Global White		

SUSTAINABILITY



36



A+



E1

ACOUSTICS



EN ISO 10848-2
& EN ISO 717-1



EN ISO 140-3
& EN ISO 717-1



EN ISO 354
& EN ISO 11654

	D_{nfw}	R_w	α_w	Class	NRC	Hz α_p					
						125	250	500	1000	2000	4000
Board / Tegular / MicroLook 90	40 dB	20 dB	0.90	A	0.85	0.35	0.60	0.90	1.00	1.00	1.00

FIRE REACTION



EEA Euroclass A2-s1, d0
EN 13501-1

OTHER PERFORMANCES & FEATURES



85%



95% RH



ISO 5

ISO 14644-1



30YEAR
system
guarantee



EN 12667
& ISO 8301

$\lambda = 0.037$ W/m K



6.2 kg/m²



CUSTOM OPTIONS



Colours